

Ionization Vacuum Gauge [GI-M2/GI-D7]

This series is hot cathode type ionization vacuum gauge, capable of measuring pressure in the 9.9 to 5×10^{-8} Pa (7.4×10^{-2} to 3.75×10^{-10} Torr, 9.9×10^{-2} to 5×10^{-10} mbar) (Metal gauge, GI-M2), 6.7×10^{-1} to 1.3×10^{-6} Pa (5×10^{-3} to 9.75×10^{-9} Torr, 6.7×10^{-3} to 1.3×10^{-8} mbar) (Glass gauge, GI-D7) range using triode tube or B-A type sensor heads.



Features

- ▶ **Measures a Wide Pressure Range**
Can measure a wide pressure range from 9.9 to 5×10^{-8} Pa (GI-M2) (7.4×10^{-2} to 3.75×10^{-10} Torr, 9.9×10^{-2} to 5×10^{-10} mbar)
- ▶ **2 Types Vacuum Tube, Metal and Glass**
Sensor head selected depending on the application (bare type also available)
- ▶ **Strong Metal Vacuum Tube**
Small-sized metallic sensor head prevents it from breaking (GI-M2)
- ▶ **Sensitivity Setup**
Sensitivity setup can be changed for different gases. Allowing even more accurate pressure measurement.
- ▶ **Range Hold Function**
Ideal for fixing the measurement range
- ▶ **Control Output Signal**
2 set point output
- ▶ **Operable at Whole Function Front Panel**
Switch 1/2 filament, sensitivity setting, range hold function, degas function
- ▶ **Serial Communication Specification**
RS232C communication

- ▶ **Digital Output**
BCD output
- ▶ **Measured Value Output Signal**
Pressure is 0 to 10V Log output (pseudo-log output)

Applications


- ▶ **GI-M2**
Sputtering system
Vacuum evaporation system (turbomolecular pump type)
Pressure measurement for other general ultra-high vacuum pumping system
- ▶ **GI-D7**
Vacuum heat treatment furnace
Vacuum brazing furnace
Vacuum evaporation system (diffusion pump type)
Process control for furnaces and other industrial equipment

Ionization Vacuum Gauge [GI-M2/GI-D7]

Specifications

Product name		Metal Ionization Vacuum Gauge	Glass Ionization Vacuum Gauge
Model		model GI-M2	model GI-D7
Measurable pressure range		5.00×10 ⁻⁸ to 9.99×10 ⁰ Pa (3.75×10 ⁻¹⁰ to 7.49×10 ⁻² Torr, 5.00×10 ⁻¹⁰ to 9.99×10 ⁻² mbar)	WIT: 1.30×10 ⁻⁵ to 6.7×10 ⁻¹ Pa (9.75×10 ⁻⁸ to 5.03×10 ⁻³ Torr, 1.30×10 ⁻⁷ to 6.7×10 ⁻³ mbar) WIB: 1.30×10 ⁻⁶ to 2.3×10 ⁻² Pa (9.75×10 ⁻⁹ to 1.73×10 ⁻⁴ Torr, 1.30×10 ⁻⁸ to 2.3×10 ⁻⁴ mbar)
Accuracy		±15%	
Pressure indication		Digital indication 2 digit mantissa, 1 digit exponent	
Compatible sensor head		M-11, M-12, M-13, M-14, M-15	WIT-G1, WIB-G5, WIB-N3
Sampling time		100ms	
DEGAS		Direct electrical heating of grid AC power 1.5VA	
Functions		Range hold function, Gas sensitivity setting, Filament selection	
Measurement value output		linear output 0 to 10 VDC, Pseudo-logarithmic output 0-10VDC (1V linear signal in each digit)	
Control input		REMOTE/LOCAL, Filament ON/OFF, Filament 1/2, DEGAS ON/OFF, Range hold	
Control output		Analog output (0-10V), BCD output, Filament ON/OFF, Emission current setting, Degassing ON/OFF	
Set point (contact point capacity)		2 points (AC125V _{max} , 0.5A _{max} / DC24V _{max} , 1.0A _{max})	
Serial communication spec		RS232C	
Operating temperature range		10 to 40 °C (50 to 104 °F)	
Operating humidity range		15 to 18% (not condensing)	
Power supply voltage		AC100±10V 50/60Hz, 60VA	AC100±10V 50/60Hz, 120VA
Fuse		BS. SEMKO 3.15A (2pcs)	
External dimensions W×D×H		240mm×380mm×99mm	
Weight		5.6kg	5.7kg
Standard accessories	Power cord	3P Plug with ground	
	Connector	For external input / output	
	Instruction manual	1 copy	
Options	Sensor cable	2, 5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 55, 60m	4, 10, 15, 20, 25, 30m
	Gauge head	Metal Gauge: M-11, M-12, M-13, M-14, M-15	Triode type glass gauge: WIT-G1 B-A type glass gauge: WIB-G5 B-A type nude gauge: WIB-N3

Dimensions

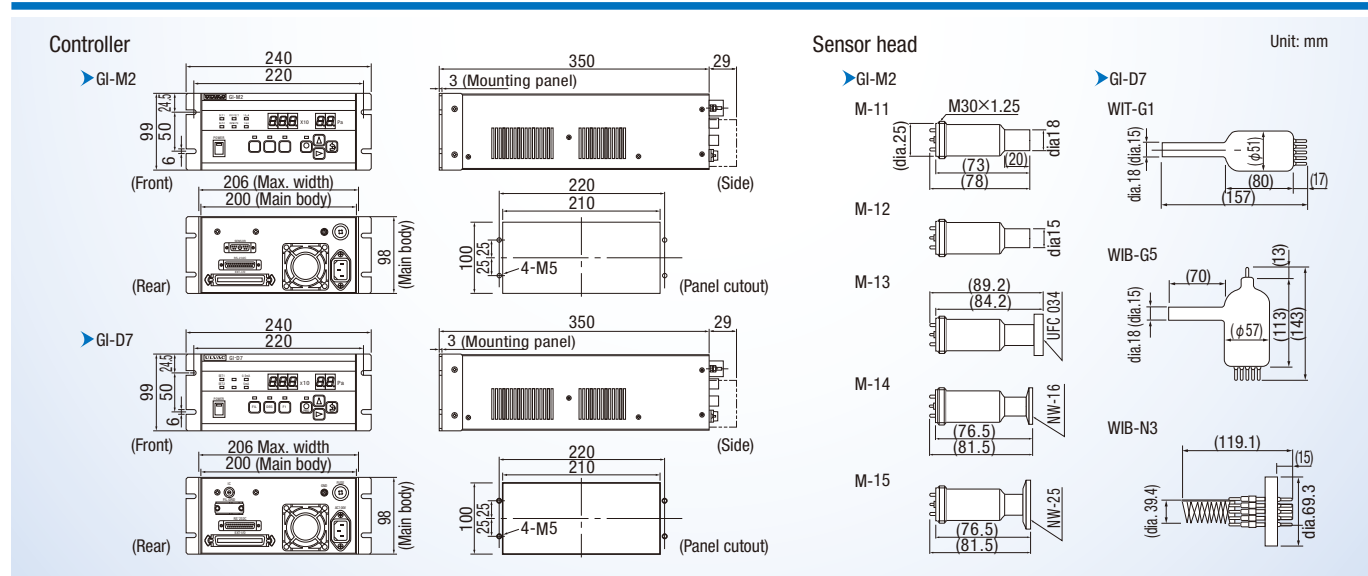

ULVAC, Inc. Components Division

www.ulvac.co.jp/eng

Overseas Sales in Japan TEL +81-467-89-2261

USA : ULVAC Technologies, Inc. TEL +1-978-686-7550
 GERMANY : ULVAC GmbH TEL +49-89-960909-0
 CHINA : ULVAC (SHANGHAI) Trading Co., Ltd. TEL +86-21-6127-6618
 TAIWAN : ULVAC TAIWAN, Inc. TEL +886-3-579-5688
 KOREA : ULVAC KOREA, Ltd. TEL +82-31-683-2922
 SINGAPORE : ULVAC SINGAPORE PTE LTD TEL +65-6542-2700

PHILIPPINES : ULVAC Singapore Philippines Branch TEL +63-2-828-7700
 VIETNAM : ULVAC Singapore Vietnam Representative Office TEL +84-8-6256762
 THAILAND : ULVAC (THAILAND) LTD TEL +66-2-312-4447
 MALAYSIA : ULVAC MALAYSIA SDN. BHD. TEL +60-3-5121-4700
 INDIA : ULVAC, Inc., India Branch TEL +91-40-27007006

▶ This catalog is subject to change without notice.
 ▶ This catalog is published in order to sell this product in overseas. Please see Japanese catalog when purchasing in Japan.